

draft **ETSI EN 302 645** V0.0.1 (2008-12)

Harmonized European Standard (Telecommunications series)

**Electromagnetic compatibility
and Radio spectrum Matters (ERM);
Short Range Devices;
Global Navigation Satellite Systems (GNSS) Repeaters;
Harmonized EN covering the essential requirements
under article 3.2 of the R&TTE Directive**



Reference

DEN/ERM-TG28-0422

Keywords

Navigation, radio, repeater, satellite

ETSI

650 Route des Lucioles
F-06921 Sophia Antipolis Cedex - FRANCE

Tel.: +33 4 92 94 42 00 Fax: +33 4 93 65 47 16

Siret N°348 623 562 00017 - NAF 742 C
Association à but non lucratif enregistrée à la
Sous-Préfecture de Grasse (06) N°7803/88

Important notice

Individual copies of the present document can be downloaded from:

<http://www.etsi.org>

The present document may be made available in more than one electronic version or in print. In any case of existing or perceived difference in contents between such versions, the reference version is the Portable Document Format (PDF). In case of dispute, the reference shall be the printing on ETSI printers of the PDF version kept on a specific network drive within ETSI Secretariat.

Users of the present document should be aware that the document may be subject to revision or change of status. Information on the current status of this and other ETSI documents is available at

<http://portal.etsi.org/tb/status/status.asp>

If you find errors in the present document, please send your comment to one of the following services:

http://portal.etsi.org/chaicor/ETSI_support.asp

Copyright Notification

No part may be reproduced except as authorized by written permission.
The copyright and the foregoing restriction extend to reproduction in all media.

© European Telecommunications Standards Institute 2009.
All rights reserved.

DECT™, PLUGTESTS™ and UMTS™ are Trade Marks of ETSI registered for the benefit of its Members.
TIPHON™ and the TIPHON logo are Trade Marks currently being registered by ETSI for the benefit of its Members.
3GPP™ is a Trade Mark of ETSI registered for the benefit of its Members and of the 3GPP Organizational Partners.

Contents

Intellectual Property Rights	4	
Foreword.....	4	
Introduction	5	
1 Scope	6	
2 References	6	
2.1 Normative references	7	
2.2 Informative references	7	
3 Definitions, symbols and abbreviations	7	
3.1 Definitions	7	
3.2 Symbols	8	
3.3 Abbreviations.....	8	
4 Technical requirements specifications	8	
4.1 Environmental profile	8	
4.2 Conformance Requirements.....	8	
4.2.1 Transmit Frequency Band	8	
4.2.1.1 Definition.....	8	
4.2.1.2 Limits.....	9	
4.2.1.3 Conformance	9	
4.2.2 Power Spectral Density (PSD)	9	
4.2.2.1 Definitions	Error! Bookmark not defined.	
4.2.2.2 Limits.....	Error! Bookmark not defined.	
4.2.2.3 Conformance	Error! Bookmark not defined.	
4.2.3 Transmitter unwanted emissions in the spurious domain.....	9	
4.2.3.1 Definition.....	9	
4.2.3.2 Limits.....	10	
4.2.3.3 Conformance	10	
4.2.4 Receiver spurious emissions	Error! Bookmark not defined.	
4.2.4.1 Definition.....	Error! Bookmark not defined.	
4.2.4.2 Limits.....	Error! Bookmark not defined.	
4.2.4.3 Conformance	Error! Bookmark not defined.	
5 Testing for compliance with technical requirements.....	10	
5.1 Conditions for testing.....	10	
5.1.1 Normal and extreme test conditions	10	
5.1.2 Test Frequencies & Operating Modes.....	10	
5.1.3 Antennas.....	11	
5.1.4 Presentation of equipment	11	
5.1.4.1 Testing of host connected equipment and plug-in radio devices	11	
5.1.4.1.1 The use of a host or test jig for testing plug-in radio devices.....	11	
5.1.4.1.2 Testing of combinations.....	12	
5.2 Interpretation of the measurement results	12	
5.3 Essential radio test suites	13	
5.3.1 Product information	13	
5.3.2 Transmit Frequency Range	13	
5.3.2.1 Test conditions.....	13	
5.3.2.2 Test methods.....	13	
5.3.2.2.1 Conducted measurement.....	13	
5.3.2.2.2 Radiated measurement	14	
5.3.3 Power Spectral Density (PSD)	14	
5.3.3.1 Test conditions.....	15	
5.3.3.2 Test method	15	
5.3.3.2.1 Conducted measurement.....	15	
5.3.3.2.2 Radiated measurement	16	
5.3.4 Transmitter unwanted emissions in the spurious domain.....	17	

5.3.4.1	Test conditions.....	17
5.3.4.2	Test method	17
5.3.4.2.1	Conducted measurement.....	17
5.3.4.2.2	Radiated measurement	18
5.3.5	Receiver spurious emissions	Error! Bookmark not defined.
5.3.5.1	Test conditions.....	Error! Bookmark not defined.
5.3.5.2	Test method	Error! Bookmark not defined.
5.3.5.2.1	Conducted measurement.....	Error! Bookmark not defined.
5.3.5.2.2	Radiated measurement	Error! Bookmark not defined.
Annex A (normative): HS Requirements and conformance Test specifications Table (HS-RTT)		19
Annex B (normative): Test sites and arrangements for radiated measurements		21
B.1	Test sites.....	21
B.1.1	Open air test sites.....	21
B.1.2	Anechoic chamber	22
B.1.2.1	General.....	22
B.1.2.2	Description.....	22
B.1.2.3	Influence of parasitic reflections	22
B.1.2.4	Calibration and mode of use.....	23
B.2	Test antenna	24
B.3	Substitution antenna.....	25
Annex C (normative): General description of measurement.....		26
C.1	Conducted measurements.....	26
C.2	Radiated measurements.....	26
C.3	Substitution measurement	27
Annex D (informative): The EN title in the official languages		28
Annex E (informative): Bibliography		29
History		30

Intellectual Property Rights

IPRs essential or potentially essential to the present document may have been declared to ETSI. The information pertaining to these essential IPRs, if any, is publicly available for **ETSI members and non-members**, and can be found in ETSI SR 000 314: *"Intellectual Property Rights (IPRs); Essential, or potentially Essential, IPRs notified to ETSI in respect of ETSI standards"*, which is available from the ETSI Secretariat. Latest updates are available on the ETSI Web server (<http://webapp.etsi.org/IPR/home.asp>).

Pursuant to the ETSI IPR Policy, no investigation, including IPR searches, has been carried out by ETSI. No guarantee can be given as to the existence of other IPRs not referenced in ETSI SR 000 314 (or the updates on the ETSI Web server) which are, or may be, or may become, essential to the present document.

Foreword

This Harmonized European Standard (Telecommunications series) has been produced by ETSI Technical Committee Electromagnetic compatibility and Radio spectrum Matters (ERM), and is now submitted for the Public Enquiry phase of the ETSI standards Two-step Approval Procedure.

The present document has been produced by ETSI in response to a mandate from the European Commission issued under Council Directive 98/34/EC (as amended) [i.2] laying down a procedure for the provision of information in the field of technical standards and regulations.

The present document is intended to become a Harmonized Standard, the reference of which will be published in the Official Journal of the European Communities referencing the Directive 1999/5/EC [i.1] of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity ("the R&TTE Directive").

Technical specifications relevant to Directive 1999/5/EC [i.1] are given in annex A.

Proposed national transposition dates	
Date of latest announcement of this EN (doa):	3 months after ETSI publication
Date of latest publication of new National Standard or endorsement of this EN (dop/e):	6 months after doa
Date of withdrawal of any conflicting National Standard (dow):	18 months after doa

Introduction

The present document is part of a set of standards developed by ETSI and is designed to fit in a modular structure to cover all radio and telecommunications terminal equipment within the scope of the R&TTE Directive. The modular structure is shown in EG 201 399 (see bibliography).

1 Scope

The present document applies to GNSS repeaters Only. GNSS receivers are not covered by this standard Neither are devices commonly called GNSS pseudolites.

GNSS repeaters are devices designed to re-transmit GNSS signals unchanged inside buildings in order to provide a usable signal for GNSS receivers that are out of sight of the GNSS satellite constellation or that they unable to connect to GNSS signal simulators. A number of potential uses for such devices have been identified, such as the provision of a signal for test and development purposes and avoiding the need for receivers in emergency vehicles to re-acquire lock upon leaving a garage.

GNSS receivers are widely used devices nowadays that enable applications using satellite-based positioning information. They are receive-only devices.

These radio equipment types are capable of operating in all or part of the frequency bands given in table 1.

Table 1: Radiocommunications service frequency bands

	Radiocommunications service frequency bands
Transmit	1 164 MHz to 1 215 MHz
Receive	1 164 MHz to 1 215 MHz
Transmit	1 215 MHz to 1 300 MHz
Receive	1 215 MHz to 1 300 MHz
Transmit	1 559 MHz to 1 610 MHz
Receive	1 559 MHz to 1 610 MHz

The types of equipment covered by the present document are as follows:

- fixed installed GNSS repeater equipment with a transmit antenna that is for indoor installation. The equipment is fitted with integral or dedicated antenna(s);

Mobile or portable GNSS repeaters are excluded from the application of the present document.

2 References

References are either specific (identified by date of publication and/or edition number or version number) or non-specific.

- For a specific reference, subsequent revisions do not apply.
- Non-specific reference may be made only to a complete document or a part thereof and only in the following cases:
 - if it is accepted that it will be possible to use all future changes of the referenced document for the purposes of the referring document;
 - for informative references.

Referenced documents which are not found to be publicly available in the expected location might be found at <http://docbox.etsi.org/Reference>.

For online referenced documents, information sufficient to identify and locate the source shall be provided. Preferably, the primary source of the referenced document should be cited, in order to ensure traceability. Furthermore, the reference should, as far as possible, remain valid for the expected life of the document. The reference shall include the method of access to the referenced document and the full network address, with the same punctuation and use of upper case and lower case letters.

NOTE: While any hyperlinks included in this clause were valid at the time of publication ETSI cannot guarantee their long term validity.

2.1 Normative references

The following referenced documents are indispensable for the application of the present document. For dated references, only the edition cited applies. For non-specific references, the latest edition of the referenced document (including any amendments) applies.

- [1] ETSI TR 100 028 (2001-12) (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Uncertainties in the measurement of mobile radio equipment characteristics".
- [2] CISPR 16 (2006) , (parts 1-1, 1-4 and 1-5): "Specifications for radio disturbance and immunity measuring apparatus and methods; Part 1: Radio disturbance and immunity measuring apparatus".

2.2 Informative references

- [i.1] Directive 1999/5/EC of the European Parliament and of the Council of 9 March 1999 on radio equipment and telecommunications terminal equipment and the mutual recognition of their conformity (R&TTE Directive).
- [i.2] Council Directive 98/34/EC of the European Parliament and of the Council of 22 June 1998 laying down a procedure for the provision of information in the field of technical standards and regulations.
- [i.3] ECC Report 129 on GNSS Repeaters (can be found under www.ero.dk)

3 Definitions, symbols and abbreviations

3.1 Definitions

For the purposes of the present document, the terms and definitions given in the R&TTE Directive [i1] and the following apply:

GNSS bands: the frequency bands from 1 164 MHz to 1 215 MHz, 1 215 MHz to 1 300 MHz, and from 1 559 MHz to 1 610 MHz

combined equipment: any combination of non-radio equipment that requires a plug-in radio device to offer full functionality

dedicated antenna: antenna external to the equipment, using an antenna connector with a cable and which has been designed or developed for one or more specific types of equipment

NOTE: It is the combination of dedicated antenna and radio equipment that is expected to be compliant with the regulations.

frequency band: one of the frequency ranges defined in clause 1, table 1.

host equipment: any equipment which has complete user functionality when not connected to the radio equipment part and to which the radio equipment part provides additional functionality and to which connection is necessary for the radio equipment part to offer functionality

integral antenna: antenna designed as a fixed part of the equipment, without the use of an external connector and as such which can not be disconnected from the equipment by the user with the intent to connect another antenna

NOTE: An integral antenna may be fitted internally or externally. In the case where the antenna is external, a non-detachable cable not exceeding 3 m length is allowed

plug-in radio device: radio equipment module intended to be used with or within host, combined or multi-radio equipment, using their control functions and power supply

radiated measurements: measurements which involve the absolute measurement of a radiated field

stand-alone radio equipment: equipment that is intended primarily as communications equipment and that is normally used on a stand-alone basis

3.2 Symbols

For the purposes of the present document, the following symbols apply:

dB	decibel
dBi	antenna gain relative to isotropic radiator in decibel
dBr	decibel relative to the maximum power
E	electrical field strength
f	frequency
f_c	nominal centre frequency
G_{total}	GNSS repeater total system gain
G	antenna gain
P	equivalent isotropically radiated power level
R	distance
μs	microsecond

3.3 Abbreviations

For the purposes of the present document, the following abbreviations apply:

CEPT	European Conference of Postal and Telecommunications Administrations
e.i.r.p.	equivalent isotropically radiated power
EC	European Commission
ECC	Electronic Communications Committee
EMC	Electro Magnetic Compatibility
e.r.p.	effective radiated power
GNSS	Global Navigation Satellite System
HS	Harmonized Standard
ppm	parts per million = 10^{-6}
PSD	Power Spectral Density
RF	Radio Frequency
UUT	Unit Under Test

4 Technical requirements specifications

4.1 Environmental profile

The technical requirements of the present document apply under the environmental profile for operation of the equipment, which shall be stated by the manufacturer. The equipment shall comply with all the technical requirements of the present document at all times when operating within the boundary limits of the stated operational environmental profile.

4.2 Conformance Requirements

4.2.1 Transmit Frequency Band

4.2.1.1 Definition

The transmit frequency bands are the GNSS frequency bands, or part of these bands, in which the GNSS repeater can re-transmit received signals. [\(Table 1\)](#)

4.2.1.2 Limits

The actual transmit frequency band should be maintained within the GNSS bands.

4.2.1.3 Conformance

Conformance tests as defined in clause 5.3.2 shall be carried out.

4.2.2 GNSS Repeater Total Gain

4.2.2.1 Definition

The total gain of the GNSS repeater, G_{total} , is the measured maximum gain of all included radio frequency amplifiers added to the sum of the declared maximum gain of all attached antennas (the declared identified maximum gain of the GNSS repeater receive antenna and the declared maximum gain of the GNSS re-broadcast antenna).

Installed cable losses of up to 3dB can be assumed.

4.2.2.2 Limits

The total gain will be calculated from the measured amplifier gain and the declared maximum of the antenna gains across the declared transmit frequencies within the GNSS bands. The acceptable G_{total} gain limit is 45dB. If cable losses are assumed for the equipment, then G_{total} may not exceed 48dB.

;

4.2.2.3 Conformance

Conformance tests as defined in clause 5.3.3 shall be carried out.

4.2.3. Output power limitation

4.2.3.1 Definitions

The output power limitation is the maximum equivalent isotropically radiated power (e.i.r.p.) of the equipment for a sinusoidal input signal of any power level.

It relates to the maximum output power level of the system. It is not related to the level of re-radiated GNSS signal. Re-radiated GNSS signals would be limited to a significantly lower level by virtue of the limitation on gain given in 4.2.2.

4.2.3.2 Limits

The maximum output power shall not exceed -10 dBm for a sinusoidal input signal within any of the frequency bands given in Table 1.

The limiting output power capability shall not exceed -27 dBm for a sinusoidal input signal with a frequency of 1151 MHz or below.

4.3.3.3 Conformance

Conformance tests as defined in clause 5.3.4 shall be carried out.

4.2.4 Transmitter unwanted emissions in the spurious domain

4.2.4.1 Definition

These are radio frequency emissions outside the GNSS bands, other than those of the wanted emissions and associated sidebands.

4.2.4.2 Limits

The level of spurious emissions shall not exceed the limits given in table 2 or table 3.

Table 2: General transmitter spurious emission limits outside the GNSS bands

Frequency range	Maximum power, e.r.p. (above 1 GHz: e.i.r.p.)	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 862 MHz	-54 dBm	100 kHz
862 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 1,164 GHz	-30 dBm	1 MHz
1,300 GHz to 1,559 GHz	-30 dBm	1 MHz
1,610 GHz to 12,75 GHz	-30 dBm	1 MHz

Table 3 – Specific spurious emissions limits in geographic coverage area of systems operating in other frequency bands

<u>System type operating in the same geographical area</u>	<u>Band for co-existence requirement</u>	<u>Maximum Level</u>	<u>Measurement Bandwidth</u>
<u>Aeronautical systems</u>	<u>960-1151</u>	<u>-52dBm</u>	<u>1MHz</u>
<u>DCS1800</u>	<u>1805 – 1880 MHz</u>	<u>-47 dBm</u>	<u>100 kHz</u>
	<u>1710 – 1785 MHz</u>	<u>-61 dBm</u>	<u>100 kHz</u>
<u>PCS1900</u>	<u>1930 – 1990 MHz</u>	<u>-47 dBm</u>	<u>100 kHz</u>
	<u>1850 – 1910 MHz</u>	<u>-61 dBm</u>	<u>100 kHz</u>
<u>UTRAN TDD</u>	<u>1 900 MHz to 1 920 MHz</u>	<u>-52 dBm</u>	<u>1 MHz</u>

4.2.4.3 Conformance

Conformance tests as defined in clause 5.3.5 shall be carried out.

5 Testing for compliance with technical requirements

5.1 Conditions for testing

5.1.1 Normal and extreme test conditions

Tests defined in the present document shall be carried out under normal test conditions and where stated, under the extreme test conditions as declared by the manufacturer (see clause 4.1)

5.1.2 Test Frequencies & Operating Modes

The measurements for the RF gain and Power Spectral Density (PSD) shall be performed at the lowest and highest frequency for each of the stated frequency ranges the GNSS repeater is intended to re-transmit. The measurements for transmitter and receiver spurious emissions shall be performed when operating on one of the frequencies for each of the stated frequency ranges.

If the equipment has different nominal transmit bandwidths, the measurements need to be repeated for each of the repeater transmit bandwidth.

For the purpose of testing of the GNSS repeater for its maximum gain an input signal shall be provided to the receiver front end (either the connector, or in case of an integrated antenna, to the receiving antenna).

Note: Confirmation of the total gain of the system can be measured by sweeping a narrow band 20kHz signal across the transmit bandwidth, the swept input signal to be set at a value of -80dBm/20 kHz. The resultant value displayed on a spectrum analyser using peak hold shall not exceed a value of -35dBm/20kHz.

For the purpose of testing of the GNSS repeater emissions, [for Power Spectral Density Measurements](#) a white-noise input signal shall be provided to the receiver front end (either the connector, or in case of an integrated antenna, to the receiving antenna).

NOTE: Only a relatively small power is needed. Assuming a GNSS signal strength of -160 dBW/24 MHz (approximately -144 dBm/1 MHz) at the earth surface referenced to an isotropic antenna, and a typical receive antenna gain of 3 dBi, the typical GNSS input signal would be approximately -140 dBm/MHz.

An white-noise signal source from a signal generator shall be applied to the input of the GNSS receiver with a PSD of -105 dBm/MHz for the purpose of testing the [gain of the amplifier and the](#) re-transmitted emissions.

NOTE: seen in the context with the limit of -60 dBm/MHz, this ensures that the maximum total gain of any GNSS transmitting device is not in excess of 45 dBi. Typically, this total gain may be provided by two low noise amplifiers ([LNA](#) receive [amplifier](#) and [another](#) transmit amplifier) in a series. At the same time, it enables measurements (conducted and radiated) down to -10 dB of the maximum mean re-transmitted signals. A total gain of 45 dBi is comparable to the achievable operating distance (i.e. propagation loss to be overcome) of a few metres of the GNSS repeater. G_{Total} gain includes the gain of all amplifiers and antenna gains as well as cables losses.

5.1.3 Antennas

The equipment can have either integral or dedicated antennas.

Dedicated antennas, further referred to as *dedicated external antennas*, are antennas that are physically external to the equipment and which are assessed in combination with the equipment against the requirements in the present document.

NOTE: It should be noted that assessment does not necessarily lead to testing.

An antenna assembly referred to in the present document is understood as the combination of the antenna (integral or dedicated), its coaxial cable and if applicable, its antenna connector and associated switching components.

Although the measurement methods in the present document allow conducted measurements to be performed, it should be noted that the equipment together with all its intended antenna assemblies shall comply with the applicable technical requirements defined in the present document.

5.1.4 Presentation of equipment

5.1.4.1 Testing of host connected equipment and plug-in radio devices

For combined equipment and for radio parts for which connection to or integration with host equipment is required to offer functionality to the radio, different alternative test approaches are permitted. Where more than one such combination is intended, testing shall not be repeated for combinations of the radio part and various host equipment where the latter are substantially similar.

Where more than one such combination is intended and the combinations are not substantially similar, one combination shall be tested against all requirements of the present document and all other combinations shall be tested separately for radiated spurious emissions only.

5.1.4.1.1 The use of a host or test jig for testing plug-in radio devices

Where the radio part is a plug-in radio device which is intended to be used within a variety of combinations, a suitable test configuration consisting of either a test jig or a typical host equipment shall be used. This shall be representative for the range of combinations in which the device may be used. The test jig shall allow the radio equipment part to be powered and stimulated as if connected to or inserted into host or combined equipment. Measurements shall be made to all requirements of the present document.

5.1.4.1.2 Testing of combinations

5.1.4.1.2.1 Alternative A: General approach for combinations

Combined equipment or a combination of a plug-in radio device and a specific type of host equipment may be used for testing according to the full requirements of the present document.

5.1.4.1.2.2 Alternative B: For host equipment with a plug-in radio device

A combination of a plug-in radio device and a specific type of host equipment may be used for testing according to the full requirements of the present document.

For radiated spurious emission tests the most appropriate standard shall be applied to the host equipment. The plug-in radio device shall meet the radiated spurious emissions requirements as described in the present document.

5.1.4.1.2.3 Alternative C: For combined equipment with a plug-in radio device

Combined equipment may be used for testing according to the full requirements of the present document.

For radiated spurious emissions the requirements of the most appropriate harmonized EMC standard shall be applied to the non-radio equipment. The plug-in radio device shall meet the radiated spurious emissions requirements as described in the present document.

In the case where the plug-in radio device is totally integrated and cannot operate independently, radiated spurious emissions for the combination shall be tested using the most appropriate harmonized standard with the radio part in receive and/or standby mode. If the frequency range is less than the one defined in the present document, additional measurements according to the requirements in the present document shall be performed to cover the remaining parts of the frequency range. With the radio in transmit mode, the radiated spurious emissions requirements of the present document shall be applied.

5.1.4.1.2.4 Alternative D: For equipment with multiple radios

Multi-radio equipment, where at least one of the radio parts is within the scope of the present document, may be used for testing according to the full requirements of the present document. Additional requirements and limits for multi-radio equipment are set out in the relevant harmonized radio product standards applicable to the other radio parts.

When measuring spurious emissions in the receive and/or standby mode, it is essential that none of the transmitters within the combined equipment are transmitting.

5.1.4.1.2.4.1 The spurious emissions from each radio can be identified

Where the spurious emissions from each radio can be identified, then the spurious emissions from each radio are assessed to the relevant harmonized radio standard.

5.1.4.1.2.4.2 The spurious emissions from each radio cannot be identified

Where the spurious emissions from each radio cannot be identified, then the combined equipment is assessed to the spurious emission requirements contained in all of the relevant harmonized radio standards applicable to the radios contained within the combined product.

Where the applicable harmonized radio standards contain different limits and measuring conditions, then the combined product is assessed to the harmonized radio standard that specifies the least stringent limits for the common part of the frequency measurement ranges. To assess the remaining parts of the frequency measurement ranges the limits from the relevant harmonized radio standard should be used.

5.2 Interpretation of the measurement results

The interpretation of the results recorded in a test report for the measurements described in the present document shall be as follows:

- the measured value related to the corresponding limit shall be used to decide whether an equipment meets the requirements of the present document;
- the value of the measurement uncertainty for the measurement of each parameter shall be separately included in the test report;
- the recorded value of the measurement uncertainty shall be, for each measurement, equal to or lower than the figures in table 4;

The measurement uncertainty figures shall be calculated in accordance with TR 100 028 [1] and shall correspond to an expansion factor (coverage factor) $k = 1,96$ or $k = 2$ (which provide confidence levels of respectively 95 % and 95,45 % in the case where the distributions characterizing the actual measurement uncertainties are normal (Gaussian)).

Table 4 is based on such expansion factors.

Table 4: Maximum measurement uncertainty

Parameter	Uncertainty
RF frequency	$\pm 1 \times 10^{-5}$
RF power conducted	$\pm 1,5$ dB
RF power radiated	± 6 dB
Humidity	± 5 %
Temperature	$\pm 1^{\circ}\text{C}$

5.3 Essential radio test suites

5.3.1 Product information

The following information is necessary in order to carry out the test suites:

- the operating frequency range(s) of the equipment.
- for each of the frequency ranges, the corresponding nominal re-transmission bandwidth(s) of the equipment;
- the type of the antenna: integral or dedicated;
- the intended combination(s) of the radio equipment power settings and one or more antenna assemblies and their corresponding eirp spectral density levels;
- the normal and the extreme operating conditions (e.g. voltage and temperature) that apply to the equipment;
- the type of equipment, for example: stand-alone equipment, plug-in radio device, combined equipment, etc.

5.3.2 Transmit Frequency Range

5.3.2.1 Test conditions

These measurements shall be performed under normal test conditions.

For a UUT with antenna connector(s) and using dedicated external antenna(s), or for a UUT with integral antenna(s) but with a temporary antenna connector provided, conducted measurements shall be used.

For a UUT with integral antenna(s) and without a temporary antenna connector, radiated measurements shall be used.

5.3.2.2 Test methods

5.3.2.2.1 Conducted measurement

The UUT shall be connected to the spectrum analyser.

The settings of the spectrum analyser shall be adjusted to optimize the instruments frequency accuracy.

The white- noise input signal [from a signal generator](#) shall be applied to the UUT.

The Max Hold function shall be selected and the centre frequency shall be adjusted to the centre re-transmission frequency of the UUT.

The maximum mean value of the power envelope shall be measured and recorded. The frequency span of the spectrum analyser shall be reduced and the marker shall be moved in a positive frequency increment until the upper, (relative to the centre frequency), - 10 dBr relative to the maximum of re-transmission is reached. This value shall be noted as f1.

The marker shall then be moved in a negative frequency increment until the lower, (relative to the centre frequency), - 10 dBr point is reached. This value shall be noted as f2.

The centre of re-transmission is calculated as $(f1 + f2)/2$. This value shall be compared with declared re-transmission centre frequency for the respective GNSS band to calculate the frequency error which shall be recorded.

5.3.2.2.2 Radiated measurement

The test set up as described in annex B shall be used with a spectrum analyser of sufficient accuracy attached to the test antenna.

The test procedure is as described under clause 5.3.2.2.1.

5.3.3 [5.3.4 GNSS Repeater Total gain](#)

[5.3.4.1 Test conditions](#)

[For a UUT with antenna connector\(s\) and using dedicated external antenna\(s\), or for a UUT with integral antenna\(s\) but with a temporary antenna connector provided, conducted measurements shall be used.](#)

[For a UUT with integral antenna\(s\) and without a temporary antenna connector, radiated measurements shall be used.](#)

[The UUT shall be configured to operate at the highest stated transmitter output power level, i.e. the highest gain step.](#)

[5.3.4.2 Test method](#)

[5.3.4.2.1 Conducted measurement](#)

[These measurements need only to be performed at normal test conditions.](#)

[For the purpose of this test, the minimum transmitter on-time from the signal generator shall be 10 \$\mu\$ s.](#)

[The transmitter shall be connected to the measuring equipment via a suitable attenuator and the Gain \$G_{total}\$ as defined shall be measured and recorded.](#)

[The Gain \$G_{total}\$ shall be determined using a spectrum analyser of adequate bandwidth](#)

[The Gain \$G_{total}\$ to be measured is the highest gain found in any 1 MHz band.](#)

[Step 0](#)

[Connect the signal generator transmitter output signal to the spectrum analyser and check that the signal is set at -80dBm/20kHz.](#)

[Step 1:](#)

[Connect the UUT to the spectrum analyser and use the following settings:](#)

- [Centre Frequency:](#) [The centre frequency of the GNSS re-transmission under test](#)
- [Resolution BW:](#) [20kHz](#)
- [Video BW:](#) [20kHz](#)

- Frequency Span: 2 x Nominal re-transmission bandwidth (e.g. 40 MHz for a 20 MHz re-transmission bandwidth)
- Detector Mode: average
- Trace Mode: Max Hold

Step 2:

When the trace is complete, record the level against frequency.

NOTE: The detector mode "Average" is often referred to as "RMS Average" but do not use Video Average.

Step 3:

When the trace is complete, the trace shall be captured using the "Hold" or "View" option on the spectrum analyser.

Find the maximum value of the trace and place the analyser marker on this maximum. The difference between this and the -80dBm/20kHz level is recorded Gain G_{total} .

In case of conducted measurements on smart antenna systems operating in a mode with multiple transmit chains active simultaneously, the G_{total} of each transmit chain shall be measured separately to calculate the total G_{total} for the UUT.

Step 4:

- Gain shall be recorded in the test report.

5.3.3.2.2 Radiated measurement

When performing radiated measurements on a UUT with a directional antenna, the UUT shall be configured/positioned for maximum EIRP in the horizontal plane.

A test site as described in annex B and using the applicable measurement procedures as described in annex C shall be used.

The test procedure is further as described under clause 5.3.3.2.1.

For measuring the RF output power, it is likely that a radiated measurement would be performed using a spectrum analyser or measurement receiver, rather than a wide band power sensor. If this is the case and if the resolution bandwidth capability of the measurement device is narrower than the occupied bandwidth of the UUT signal measured, then the method of measurement shall be documented in the test report.

Radiated measurements shall be conducted inside an anechoic chamber and a substitution antenna method used to assess the input level to the GNSS repeater against which the gain measurement will be assessed.

5.3.4 Maximum output power**5.3.4.1 Test conditions**

For a UUT with antenna connector(s) and using dedicated external antenna(s), or for a UUT with integral antenna(s) but with a temporary antenna connector provided, conducted measurements shall be used.

For a UUT with integral antenna(s) and without a temporary antenna connector, radiated measurements shall be used.

The UUT shall be configured to operate at the highest stated transmitter output power level, i.e. the highest gain step.

5.3.4.2 Test method**5.3.4.2.1 Conducted measurement**

These measurements need only to be performed at normal test conditions.

For the purpose of this test, the minimum transmitter on-time shall be 10 μ s.

The [RF signal generator](#) transmitter shall be connected to the measuring equipment via a suitable attenuator and the power as defined shall be measured and recorded.

The power shall be determined using a spectrum analyser of adequate bandwidth in combination with an RF power meter.

Connect an RF power meter to the narrow IF output of the spectrum analyser and correct its reading using a known reference source, e.g. a signal generator.

NOTE: The IF output of the spectrum analyser may be 20 dB or more below the input level of the spectrum analyser. Unless the power meter has adequate sensitivity, a wideband amplifier may be required.

The power to be measured is the highest mean power level found in any 1 MHz band.

Step 1:

Use the following settings for the spectrum analyser:

- Centre Frequency: The centre frequency of the GNSS re-transmission under test
- Resolution BW: 1 MHz
- Video BW: 1 MHz
- Frequency Span: 2 x Nominal re-transmission bandwidth (e.g. 40 MHz for a 20 MHz re-transmission bandwidth)
- Detector Mode: average
- Trace Mode: Max Hold

Step 1:

[The test signal input range of a connected RF signal generator shall be input level of \$\pm 45\$ dB below the test limit. Connect this](#) to the Spectrum Analyser and adjust the level and frequency of the signal generator to the [GNSS centre frequency](#).

NOTE: It is advisable to use the same cable which was connected before to the UUT.

Fine tune the frequency of the generator for the highest indication on the power meter. This to ensure that the frequency of the signal generator is identical to the centre frequency of the analyser.

[Connect the RF signal generator to the GNSS repeater and the output of the GNSS repeater to a power meter.](#)

[Measure and record the output power of the repeater, for input signal powers ranging from -10 to +10 db of the test signal input range limit. Record the result.](#)

5.3.4.2.2 Radiated measurement

When performing radiated measurements on a UUT with a directional antenna, the UUT shall be configured/positioned for maximum EIRP in the horizontal plane.

A test site as described in annex B and using the applicable measurement procedures as described in annex C shall be used.

The test procedure is further as described under clause 5.3.4.2.1.

For measuring the RF output power, it is likely that a radiated measurement would be performed using a spectrum analyser or measurement receiver, rather than a wide band power sensor. If this is the case and if the resolution bandwidth capability of the measurement device is narrower than the occupied bandwidth of the UUT signal measured, then the method of measurement shall be documented in the test report.

5.3.5 Transmitter unwanted emissions in the spurious domain

5.3.5.1 Test conditions

The measurements be performed under normal test conditions. The UUT shall be configured to operate at the highest stated power level.

For UUT without an integral antenna and for a UUT with an integral antenna but with a temporary antenna connector, one of the following options shall be used:

- a) the level of unwanted emissions shall be measured as their power in a specified load (conducted unwanted emissions) and their radiated power when radiated by the cabinet or structure of the equipment with the antenna connector terminated by a specified load (cabinet radiation); or
- b) the level of unwanted emissions shall be measured as their radiated power when radiated by cabinet and antenna.

In the case where the UUT has an integral antenna, but no temporary antenna connector, only radiated measurements shall be used.

5.3.5.2 Test method

5.3.4.2.1 Conducted measurement

The UUT shall be connected to a spectrum analyser capable of RF power measurements.

5.3.4.2.1.1 Pre-scan

The test procedure below shall be used to identify potential unwanted emissions of the UUT.

Step 1:

The sensitivity of the spectrum analyser should be such that the noise floor is at least 6 dB below the limits given in clause 4.2.3.2, table 2.

Step 2:

The emissions shall be measured over the range 30 MHz to 1000 MHz.

Spectrum analyser settings:

- Resolution bandwidth: 100 kHz
- Video bandwidth: 100 kHz
- Detector mode: Peak
- Trace Mode: Max Hold

Any emissions identified that fall within the 6 dB range below the applicable limit, shall be individually measured using the procedure in clause 5.3.4.2.1.2 and compared to the limits given in clause 4.2.3.2, table 2.

Step 3:

The emissions shall now be measured over the ranges:

- 1 GHz to 1,164 GHz
- 1,300 GHz to 1,559 GHz
- 1,610 GHz to 12,75 GHz

however, outside the frequencies measured under clause 5.3.3.

Spectrum analyser settings:

- Resolution bandwidth: 1 MHz
- Video bandwidth: 1 MHz
- Detector mode: Peak
- Trace Mode: Max Hold

NOTE: For these pre-scan measurements, the bands adjacent to the GNSS bands (20 MHz above and below the respective band) should be monitored for an extended period of time, e.g. by using a sweep time of 30 seconds or more.

Any emissions identified during the sweeps above that fall within the 6 dB range below the applicable limit, shall be individually measured using the procedure in clause 5.3.4.2.1.2 and compared to the limits given in clause 4.2.3.2, table 2.

5.3.5.2.1.2 Measurement of the emissions identified during the pre-scan

The limits for unwanted emissions in clause 4.2.3.2 refer to average power levels.

The steps below shall be used to accurately measure the individual unwanted emissions identified during the pre-scan measurements above.

A simple measurement using the Video Average detector of the spectrum analyser is permitted. The measured values shall be recorded and compared with the limits in clause 4.2.3.2, table 2.

Step 1:

The level of the emissions shall be measured in the time domain, using the following spectrum analyser settings:

- Centre Frequency: Frequency of emission identified during the pre-scan
- Resolution Bandwidth: 100 kHz (< 1 GHz) / 1 MHz (> 1 GHz)
- Video Bandwidth: 100 kHz (< 1 GHz) / 1 MHz (> 1 GHz)
- Frequency Span: 0 Hz
- Trigger: Video Trigger
- Detector: Peak
- Trace Mode: Clear Write

Adjust the centre frequency (fine tune) to capture the highest level of one burst or sequence of the emission to be measured.

Step 2:

Change the following setting on the spectrum analyser:

- Detector: Video Average, minimum of 100 sweeps.

The measured value is the average power of this emission during the on-time of the burst. The value shall be recorded and compared with the limit in clause 4.2.3.2.

5.3.2.2 Radiated measurement

The test set up as described in annex B shall be used with a spectrum analyser of sufficient accuracy attached to the test antenna (see clause 5.2).

The test procedure is as described under clause 5.3.4.2.1.

Annex A (normative): HS Requirements and conformance Test specifications Table (HS-RTT)

The HS Requirements and conformance Test specifications Table (HS-RTT) in table A.1 serves a number of purposes, as follows:

- it provides a statement of all the requirements in words and by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it provides a statement of all the test procedures corresponding to those requirements by cross reference to (a) specific clause(s) in the present document or to (a) specific clause(s) in (a) specific referenced document(s);
- it qualifies each requirement to be either:
 - Unconditional: meaning that the requirement applies in all circumstances; or
 - Conditional: meaning that the requirement is dependent on the manufacturer having chosen to support optional functionality defined within the schedule;
- in the case of Conditional requirements, it associates the requirement with the particular optional service or functionality;
- it qualifies each test procedure to be either:
 - Essential: meaning that it is included with the Essential Radio Test Suite and therefore the requirement shall be demonstrated to be met in accordance with the referenced procedures;
 - Other: meaning that the test procedure is illustrative but other means of demonstrating compliance with the requirement are permitted.

Table A.1: HS Requirements and conformance Test specifications Table (HS-RTT)

Harmonized Standard EN 302 645						
The following technical requirements and test specifications are relevant to the presumption of conformity under Article 3.2 of the R&TTE Directive						
Essential Requirement			Requirement Conditionality		Test Specification	
No	Description	Reference: Clause No	U/C	Condition	E/O	Reference: Clause No
1	Transmit Frequency Band	4.2.1	C	Applies to GNSS Repeaters only	E	5.3.2
2	Power Spectral Density (PSD)	4.2.2	C	Applies to GNSS Repeaters only	E	5.3.3
3	Transmitter unwanted emissions in the spurious domain	4.2.3	C	Applies to GNSS Repeaters only	E	5.3.4
4	Receiver spurious emissions	4.2.4	U		E	5.3.5

Key to columns:

Essential Requirement:

No A unique identifier for one row of the table which may be used to identify a requirement or its test specification.

Description A textual reference to the requirement.

Clause Number Identification of clause(s) defining the requirement in the present document unless another document is referenced explicitly.

Requirement Conditionality:

- U/C** Indicates whether the requirement is to be *unconditionally* applicable (U) or is *conditional* upon the manufacturers claimed functionality of the equipment (C).
- Condition** Explains the conditions when the requirement shall or shall not be applicable for a technical requirement which is classified "conditional".

Test Specification:

- E/O** Indicates whether the test specification forms part of the Essential Radio Test Suite (E) or whether it is one of the Other Test Suite (O).

NOTE: All tests whether "E" or "O" are relevant to the requirements. Rows designated "E" collectively make up the Essential Radio Test Suite; those designated "O" make up the Other Test Suite; for those designated "X" there is no test specified corresponding to the requirement. The completion of all tests classified "E" as specified with satisfactory outcomes is a necessary condition for a presumption of conformity. Compliance with requirements associated with tests classified "O" is a necessary condition for presumption of conformity, although conformance with the requirement may be claimed by an equivalent test or by manufacturer's assertion supported by appropriate entries in the technical construction file.

- Clause Number** Identification of clause(s) defining the test specification in the present document unless another document is referenced explicitly. Where no test is specified (that is, where the previous field is "X") this field remains blank.

Annex B (normative): Test sites and arrangements for radiated measurements

B.1 Test sites

B.1.1 Open air test sites

The term "open air" should be understood from an electromagnetic point of view. Such a test site may be really in open air or alternatively with walls and ceiling transparent to the radio waves at the frequencies considered.


An open air test site may be used to perform the measurements using the radiated measurement methods described in clause 5. Absolute or relative measurements may be performed on transmitters or on receivers; absolute measurements of field strength require a calibration of the test site. Above 1 GHz, measurements should be done in anechoic conditions. This may be met by semi anechoic sites provided reflections are avoided.

For measurements at frequencies below 1 GHz, a measurement distance appropriate to the frequency shall be used. For frequencies above 1 GHz, any suitable measuring distance may be used. The equipment size (excluding the antenna) shall be less than 20 % of the measuring distance. The height of the equipment or of the substitution antenna shall be 1,5 m; the height of the test antenna (transmit or receive) shall vary between 1 m and 4 m.

Sufficient precautions shall be taken to ensure that reflections from extraneous objects adjacent to the site do not degrade the measurement results, in particular:

- no extraneous conducting objects having any dimension in excess of a quarter wavelength of the highest frequency tested shall be in the immediate vicinity of the site according to CISPR 16 [2];
- all cables shall be as short as possible; as much of the cables as possible shall be on the ground plane or preferably below; and the low impedance cables shall be screened.

The general measurement arrangement is shown in figure B.1.

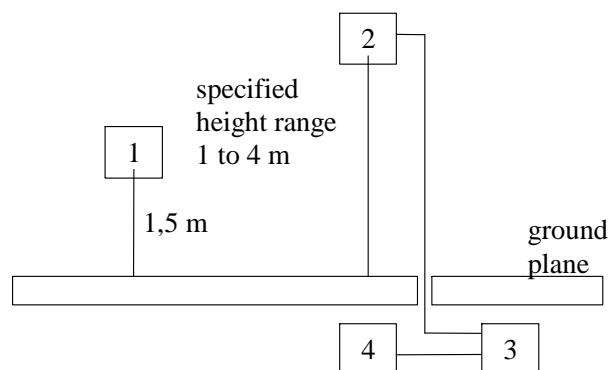

- NOTE: 1: Equipment under test.
2: Test antenna.
3: High pass filter (as required).
4: Spectrum analyser or measuring receiver.

Figure B.1: Measuring arrangement

B.1.2 Anechoic chamber

B.1.2.1 General

An anechoic chamber is a well shielded chamber covered inside with radio frequency absorbing material and simulating a free space environment. It is an alternative site on which to perform the measurements using the radiated measurement methods described in clause C.2. Absolute or relative measurements may be performed on transmitters or on receivers. Absolute measurements of field strength require a calibration of the anechoic chamber. The test antenna, equipment under test and substitution antenna are used in a way similar to that at the open air test site, but are all located at the same fixed height above the floor.

B.1.2.2 Description

An anechoic chamber should meet the requirements for shielding loss and wall return loss as shown in figure B.2. Figure B.3 shows an example of the construction of an anechoic chamber having a base area of 5 m by 10 m and a height of 5 m. The ceiling and walls are coated with pyramidically formed absorbers approximately 1 m high. The base is covered with special absorbers which form the floor. The available internal dimensions of the chamber are 3 m x 8 m x 3 m, so that a maximum measuring distance of 5 m in the middle axis of this chamber is available. The floor absorbers reject floor reflections so that the antenna height need not be changed. Anechoic chambers of other dimensions may be used.

B.1.2.3 Influence of parasitic reflections

For free-space propagation in the far field, the relationship of the field strength E and the distance R is given by $E = E_0 \times (R_0/R)$, where E_0 is the reference field strength and R_0 is the reference distance. This relationship allows relative measurements to be made as all constants are eliminated within the ratio and neither cable attenuation nor antenna mismatch or antenna dimensions are of importance.

If the logarithm of the foregoing equation is used, the deviation from the ideal curve may be easily seen because the ideal correlation of field strength and distance appears as a straight line. The deviations occurring in practice are then clearly visible. This indirect method shows quickly and easily any disturbances due to reflections and is far less difficult than the direct measurement of reflection attenuation.

With an anechoic chamber of the dimensions given above at low frequencies below 100 MHz there are no far field conditions, but the wall reflections are stronger, so that careful calibration is necessary. In the medium frequency range from 100 MHz to 1 GHz the dependence of the field strength to the distance meets the expectations very well. Above 1 GHz, because more reflections will occur, the dependence of the field strength to the distance will not correlate so closely.

B.1.2.4 Calibration and mode of use

The calibration and mode of use is the same as for an open air test site, the only difference being that the test antenna does not need to be raised and lowered whilst searching for a maximum, which simplifies the method of measurement.

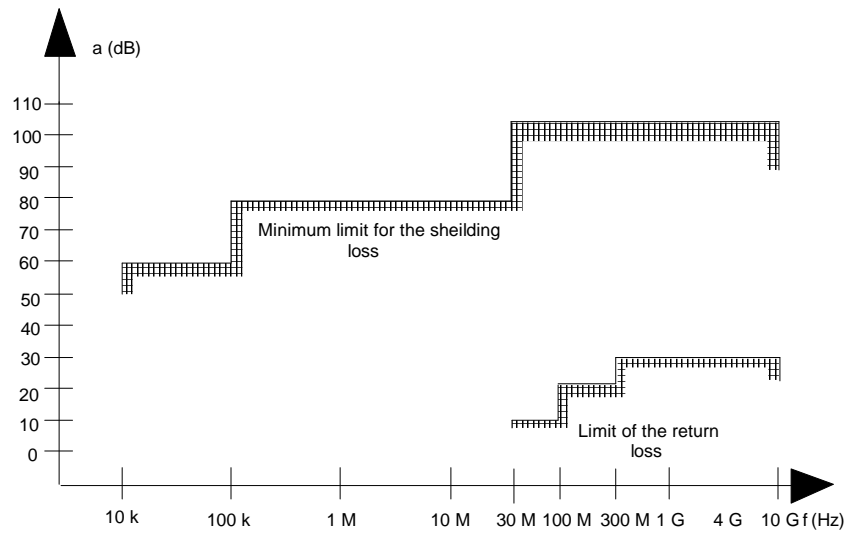


Figure B.2: Specification for shielding and reflections

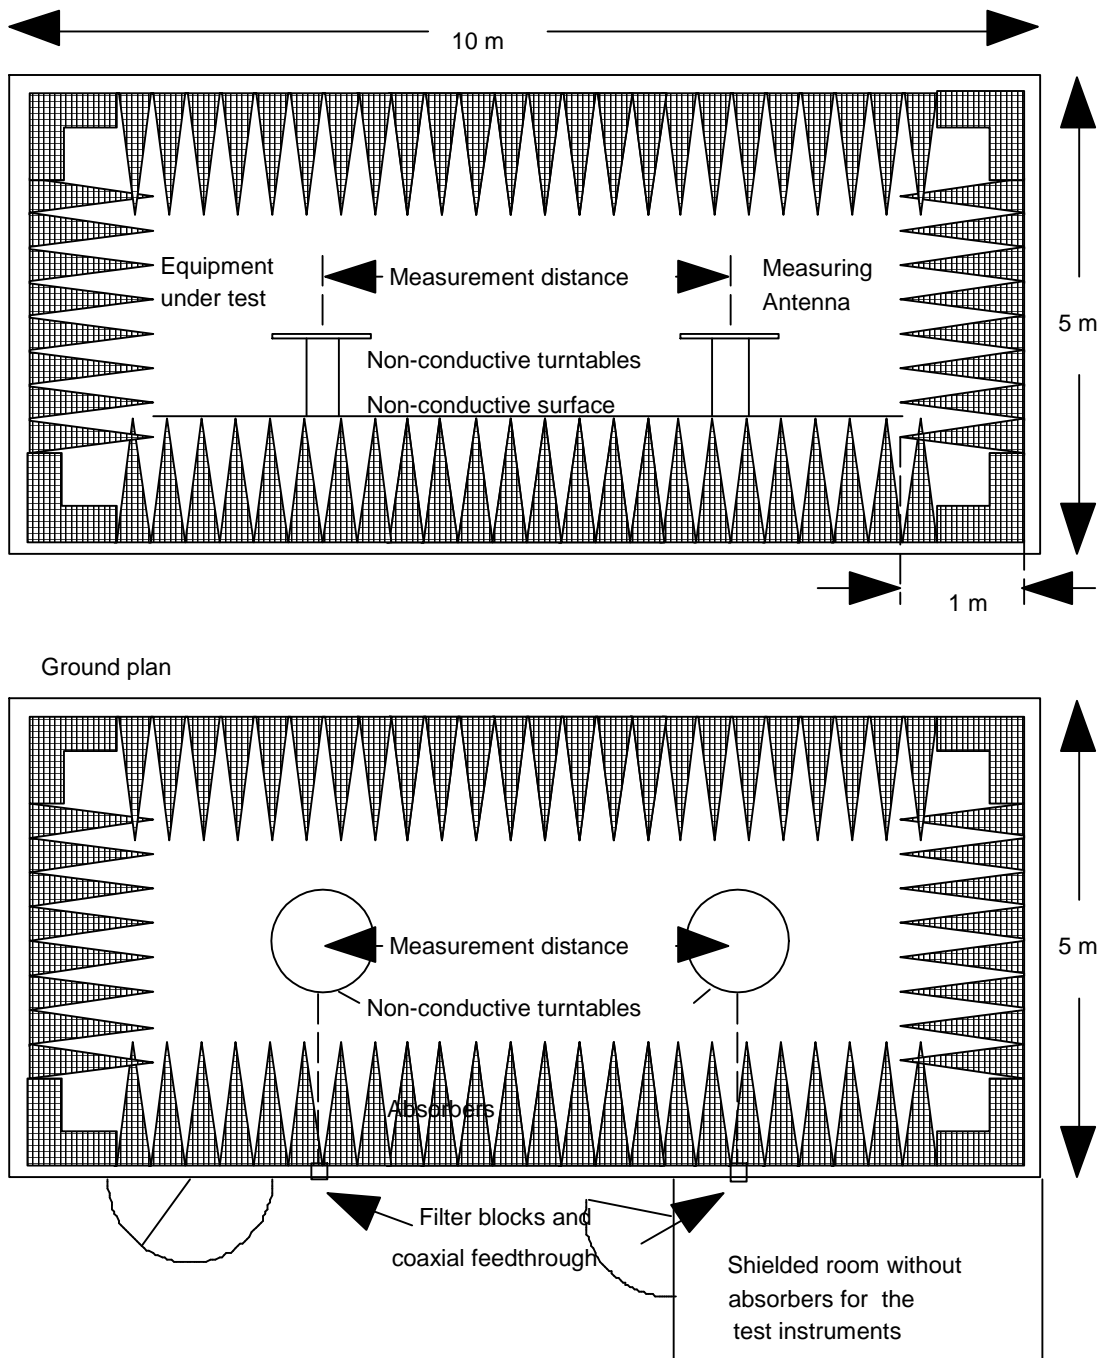


Figure B.3: Anechoic shielded chamber for simulated free space measurements

B.2 Test antenna

When the test site is used for radiation measurements the test antenna shall be used to detect the field from both the test sample and the substitution antenna. When the test site is used for the measurement of receiver characteristics the antenna shall be used as a transmitting antenna. This antenna shall be mounted on a support capable of allowing the antenna to be used in either horizontal or vertical polarization and for the height of its centre above the ground to be varied over the specified range. Preferably test antennas with pronounced directivity should be used. The size of the test antenna along the measurement axis shall not exceed 20 % of the measuring distance.

B.3 Substitution antenna

The substitution antenna shall be used to replace the UUT in substitution measurements. For measurements below 1 GHz the substitution antenna shall be a half wavelength dipole resonant at the frequency under consideration, or a shortened dipole, calibrated to the half wavelength dipole. For measurements between 1 GHz and 4 GHz either a half wavelength dipole or a horn radiator may be used. For measurements above 4 GHz a horn radiator shall be used. The centre of this antenna shall coincide with the reference point of the test sample it has replaced. This reference point shall be the volume centre of the sample when its antenna is mounted inside the cabinet, or the point where an outside antenna is connected to the cabinet.

The distance between the lower extremity of the dipole and the ground shall be at least 30 cm.

NOTE: The gain of a horn antenna is generally expressed relative to an isotropic radiator.

Annex C (normative): General description of measurement

This annex gives the general methods of measurements for RF signals using the test sites and arrangements described in annex B.

C.1 Conducted measurements

Conducted measurements may be applied to equipment provided with an antenna connector e.g. by means of a spectrum analyser.

C.2 Radiated measurements

Radiated measurements shall be performed with the aid of a test antenna and measurement instruments as described in annex B. The test antenna and measurement instrument shall be calibrated according to the procedure defined in this annex. The equipment to be measured and the test antenna shall be oriented to obtain the maximum emitted power level. This position shall be recorded in the measurement report. The frequency range shall be measured in this position.

Radiated measurements should be performed in an anechoic chamber. For other test sites corrections may be needed (see annex B). The following test procedure applies:

- a) a test site which fulfils the requirements of the specified frequency range of this measurement shall be used. The test antenna shall be oriented initially for vertical polarization unless otherwise stated and the transmitter under test shall be placed on the support in its standard position (clause B.1.1) and switched on;
- b) for average power measurements a non-selective voltmeter or wideband spectrum analyser shall be used. For other measurements a spectrum analyser or selective voltmeter shall be used and tuned to the measurement frequency.

In either case a) or b), the test antenna shall be raised or lowered, if necessary, through the specified height range until the maximum signal level is detected on the spectrum analyser or selective voltmeter.

The test antenna need not be raised or lowered if the measurement is carried out on a test site according to clause B.1.2.



NOTE: 1: Equipment under test.
2: Test antenna.
3: Spectrum analyser or measuring receiver.

Figure C.1: Measurement arrangement 1

- the transmitter shall be rotated through 360° about a vertical axis until a higher maximum signal is received;


- the test antenna shall be raised or lowered again, if necessary, through the specified height range until a maximum is obtained. This level shall be recorded.

NOTE: This maximum may be a lower value than the value obtainable at heights outside the specified limits.

The test antenna need not be raised or lowered if the measurement is carried out on a test site according to clause B.1.2. This measurement shall be repeated for horizontal polarization. The result of the measurement is the higher power obtained from the two measurements with the indication of the corresponding polarization.

C.3 Substitution measurement

The actual signal generated by the measured equipment may be determined by means of a substitution measurement in which a known signal source replaces the device to be measured, see figure C.2. This method of measurement should be used in an anechoic chamber. For other test sites corrections may be needed, see annex B.

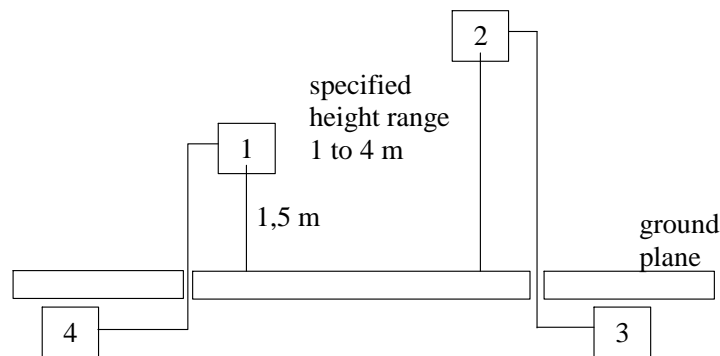

- NOTE: 1: Substitution antenna.
 2: Test antenna.
 3: Spectrum analyser or selective voltmeter.
 4: Signal generator.

Figure C.2: Measurement arrangement 2

Using measurement arrangement 2, figure C.2, the substitution antenna shall replace the transmitter antenna in the same position and in vertical polarization. The frequency of the signal generator shall be adjusted to the measurement frequency. The test antenna shall be raised or lowered, if necessary, to ensure that the maximum signal is still received. The input signal to the substitution antenna shall be adjusted in level until an equal or a known related level to that detected from the transmitter is obtained in the test receiver.

The test antenna need not be raised or lowered if the measurement is carried out on a test site according to clause B.1.2.

The radiated power is equal to the power supplied by the signal generator, increased by the known relationship if necessary and after corrections due to the gain of the substitution antenna and the cable loss between the signal generator and the substitution antenna.

This measurement shall be repeated with horizontal polarization. The result of the measurement is the higher power obtained from the two measurements with the indication of the corresponding polarization.

Annex D (informative): The EN title in the official languages

Language	EN title
Bulgarian	
Czech	
Danish	
Dutch	
English	
Estonian	
Finnish	
French	
German	
Greek	
Hungarian	
Icelandic	
Italian	
Latvian	
Lithuanian	
Maltese	
Norwegian	
Polish	
Portuguese	
Romanian	
Slovak	
Slovenian	
Spanish	
Swedish	

Annex E (informative): Bibliography

ETSI EG 201 399 (V2.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); A guide to the production of candidate Harmonized Standards for application under the R&TTE Directive".

ETSI TR 102 070-2 (V1.1.1): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Guide to the application of harmonized standards to multi-radio and combined radio and non-radio equipment; Part 2: Effective use of the radio frequency spectrum".

ETSI TR 102 273 (2001-12) (all parts): "Electromagnetic compatibility and Radio spectrum Matters (ERM); Improvement of radiated methods of measurement (using test sites) and evaluation of the corresponding measurement uncertainties".

ANSI C63.5 (2004): "American National Standard for Electromagnetic Compatibility-Radiated Emission Measurements in Electromagnetic Interference (EMI) Control-Calibration of Antennas (9 kHz to 40 GHz)".

History

Document history		
V0.0.1	December 5 th , 2008	First Draft Thomas Weber